





Ceiling Trap Doors And Access Panels

Custom Made Trap Doors



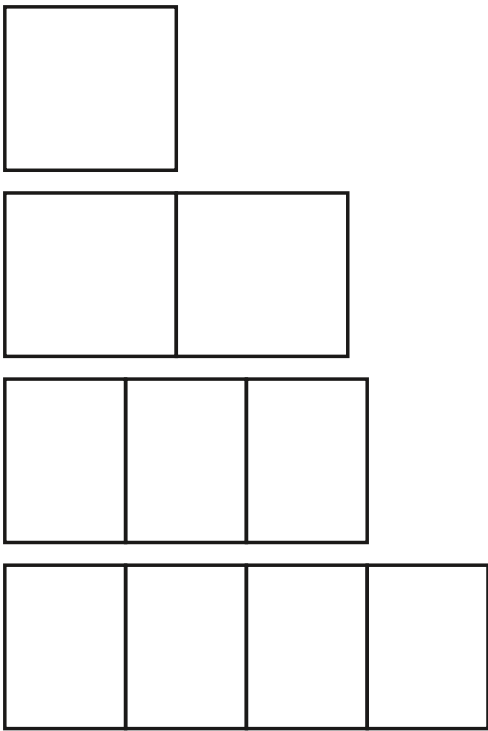

Multiple shutter configurations as per size requirements is possible

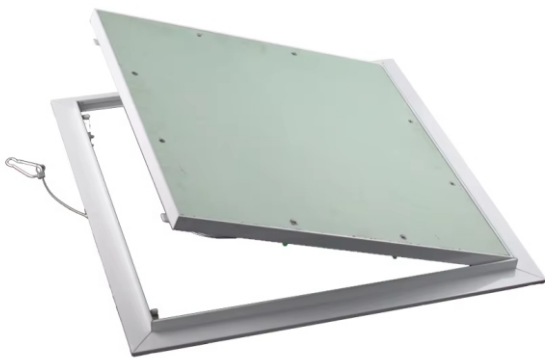

Regular Trap Door - Front



Regular Trap Door - Back



Size Reference - Trap Doors



Laminate Trap Door

Unique design

Custom sizes

Big sizes (even above 10 feet)

Light weight

Strong shutters don't warp

Only thin groove visible

Any material finish 12mm

Gypsum / MR board
ACP / Laminate / Veneer on WPC
WPC



STANDARD TRAP DOORS

Characteristics: Non-fire rated standard aluminum access panel frames are electrostatic powder coated white, with MR Grade Gypsum board facing, Providing easy access to gypsum ceilings. Each panel features a push-catch closing mechanism, with door retaining safety cable and hook. Applications Suitable for applications where access to services above gypsum ceiling are specified.

NO	SIZE(mm)	CODE
1	300 x 300	SILU3030PCMR
2	450 x 450	SILU4545PCMR
3	600 x 600	SILU6060PCMR
4	600 x 1200	SILU60120PCMR
5	1200 x 1500	SILU120150PCMR

Installation:(guide present with every package)

- 1.Remove the door from the frame, Draw around the access panel inner rim where the aperture is required ,Install the frame in to the aperture.
- 2.Fix securely using 25mm Good quality Drywall, Screws and refit the door to check operation and then remove to allow for finishing.
- 3.Finish with Gypsum Tapes and Gypsum Jointing ,Compound around the fitted frame, Refit door once decorated.
- 4.Ensure all jointing material has been removed from the frame and door edge as this will affect the door's operation
- 5.Ensure access panel doors are removed prior to installation of the frame Secure & the door in place with the hook and cable after installation

CUSTOMISED SIZES CAN BE MADE ON REQUEST WITH A LEAD TIME



Authorised dealer :

